

SKF Bearing Grease

General purpose, high load industrial bearing grease

LGNL 2

SKF LGNL 2 is a mineral oil based, anhydrous calcium soap thickened grease suitable for high load applications. This general purpose wide applications grease is an effective alternative for traditional general purpose and extreme pressure lithium based greases.

- Excellent water resistance and corrosion protection
- Good mechanical stability
- Good pumpability
- Excellent wear protection

Typical applications

- Agricultural equipment
- Conveyors
- Vibrating applications
- Mills and crushers



Available pack sizes

| Packsize | Designation |
|------------------|-------------|
| 420 ml cartridge | LGNL 2/0.4 |
| 18 kg pail | LGNL 2/18 |
| 180 kg drum | LGNL 2/180 |



Technical data

Designation **LGNL 2/(pack size)**

DIN 51825 code **KP2K-30**

NLGI consistency class **2**

Thickener **Anhydrous calcium**

Colour **Yellow brown**

Base oil type **Mineral**

Operating temperature range **-30 to +110 °C (-22 to +230 °F)**

Dropping point DIN ISO 2176 **140 °C min. (284 °F min.)**

Base oil viscosity
40 °C, mm²/s **220**
100 °C, mm²/s **14**

Penetration DIN ISO 2137
60 strokes, 10⁻¹ mm **265–295**
100 000 strokes, 10⁻¹ mm **+50 max.**

Mechanical stability
Roll stability,
50 hrs at 80 °C, 10⁻¹ mm **+70 max.**
V2F test **'M'**

Corrosion protection

Emcor:
– standard ISO 11007 **0–0**
– water washout test **0–0**

Water resistance

DIN 51 807/1, 3 hrs at 90 °C **1 max.**

Oil separation

DIN 51 817, 7 days at 40 °C, % **1–5**

Lubrication ability

R2F, running test B at 120 °C **Pass**

Copper corrosion

DIN 51 811 **2 max. at 100 °C (212 °F)**

Rolling bearing grease life

R0F test, L50 life at
10 000 r/min., hrs **1 000 min. at 110 °C (230 °F)**

EP performance


Wear scar DIN 51350/5,
1 400 N, mm **1.8 max**

4-ball test, welding load
DIN 51350/4. N **2 800 min.**

Shelf life

5 years

These characteristics represent typical values.

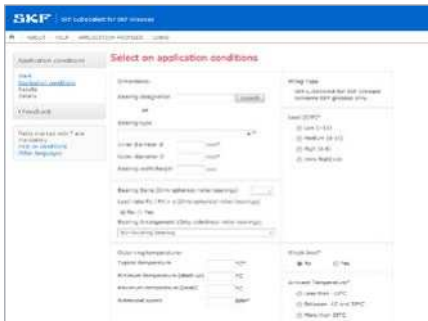

Advanced tool for grease selection and relubrication calculation

LubeSelect for SKF greases

Selecting a suitable grease for a particular bearing is a crucial step if the bearing is to meet design expectations in its application. SKF knowledge about bearing lubrication has been encapsulated into a computer program that can be consulted at skf.com/lubeselect

LubeSelect for SKF greases provides you a user friendly tool to select the right grease and suggest frequency and quantity, while taking into account the particular conditions of your application. General guidelines for typical greases for different applications are also available.



Scan or click the QR code, or go to skf.com/lubeselect

skf.com | skf.com/lubrication | skf.com/mapro

© SKF is a registered trademark of AB SKF (publ).

© SKF Group 2023. All rights reserved. Please note that this publication may not be copied or distributed, in whole or in part, unless prior written permission is granted.

Every care has been taken to ensure the accuracy of the information contained in this publication, but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB MP/P8 19614 EN · May 2023

Certain image(s) used under license from Shutterstock.com.