



**UP TO  
4 HOURS  
FIRE  
RETARDING**

**Recommended for sealing applications  
where fire resistance is required.**

**Akfix®**  
■ MASTER OF SOLUTIONS ■

**CREATES  
PERMANENT  
SOLUTIONS**





# B1 FIRE RATED PU FOAMS

Fire - Retardant gap filler,  
sealer and insulator

820/820P B1 FIRE RATED PU STRAW/GUN FOAMS



## PROPERTIES

- According to EN 1366-4 fire retardant up to 235 min.
- Efficient seal against smoke and gas.
- Does not contain CFC's and H-CFC's.
- Excellent adhesion & filling capacity.
- Excellent mounting capacity and stability.
- High thermal & acoustical insulation value.
- After cured, it can be painted, cut, trimmed.
- No shrinkage. Mould and water resistant.

## APPLICATION AREAS

All applications where fire retardant properties are required such as:

- Sealing of cable and pipe penetrations.
- Installation of door and window frames.
- Filling and sealing gaps, joints and cavities.
- Filling of penetrations in walls.
- Heat insulation of roof construction.
- Soundproofing and sealing partition walls.

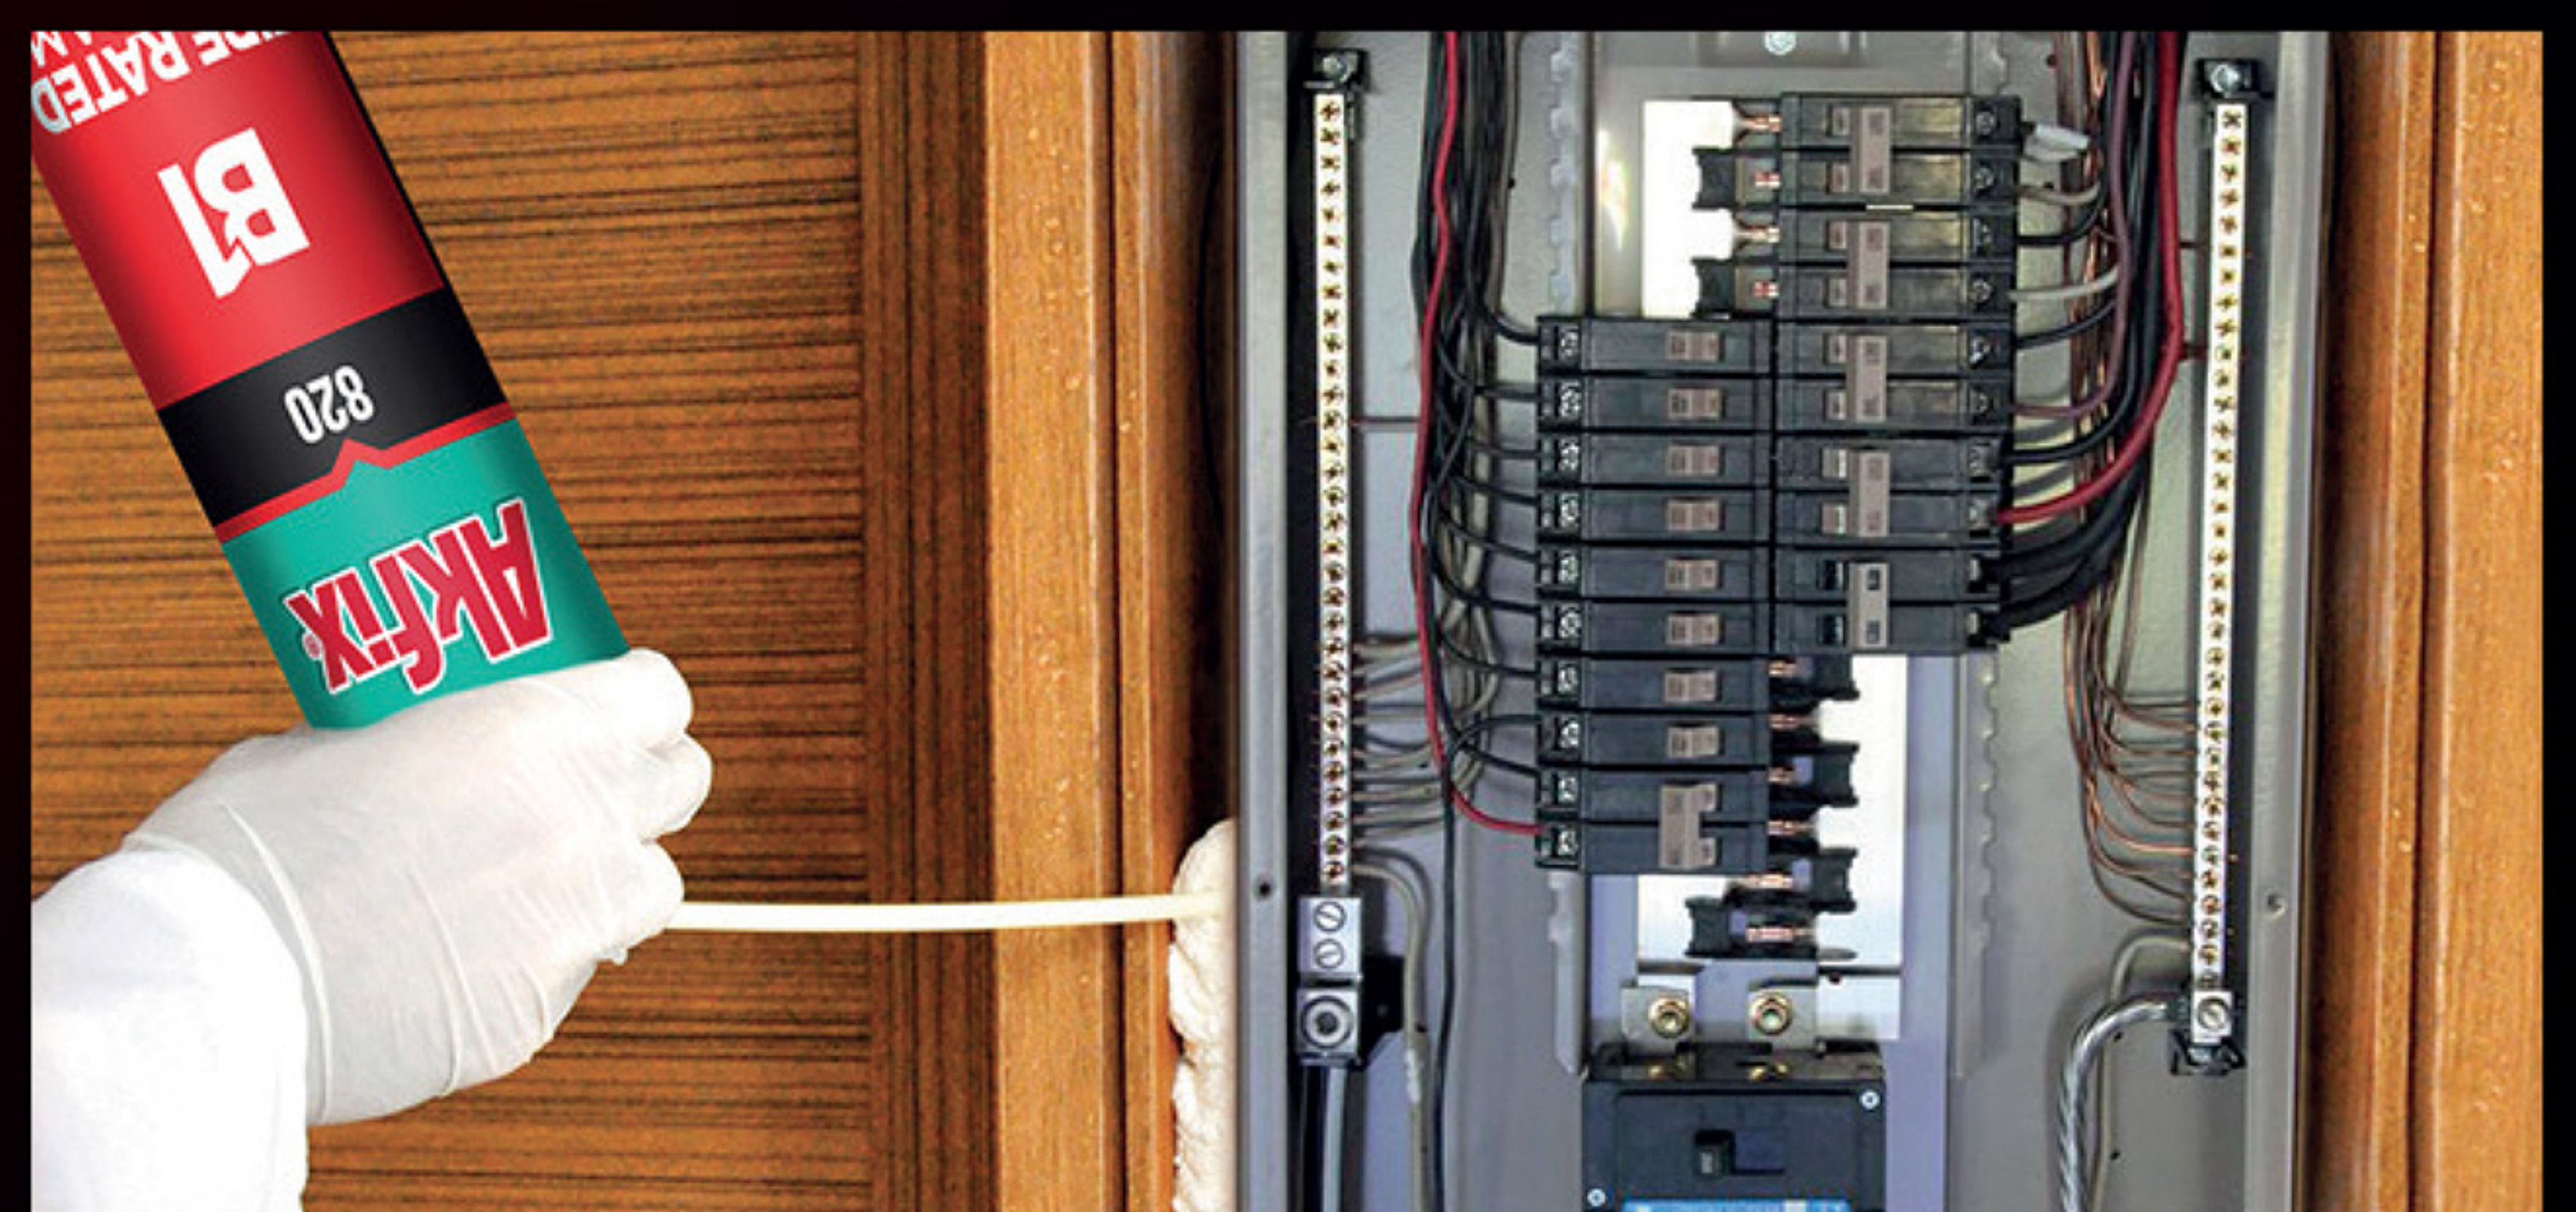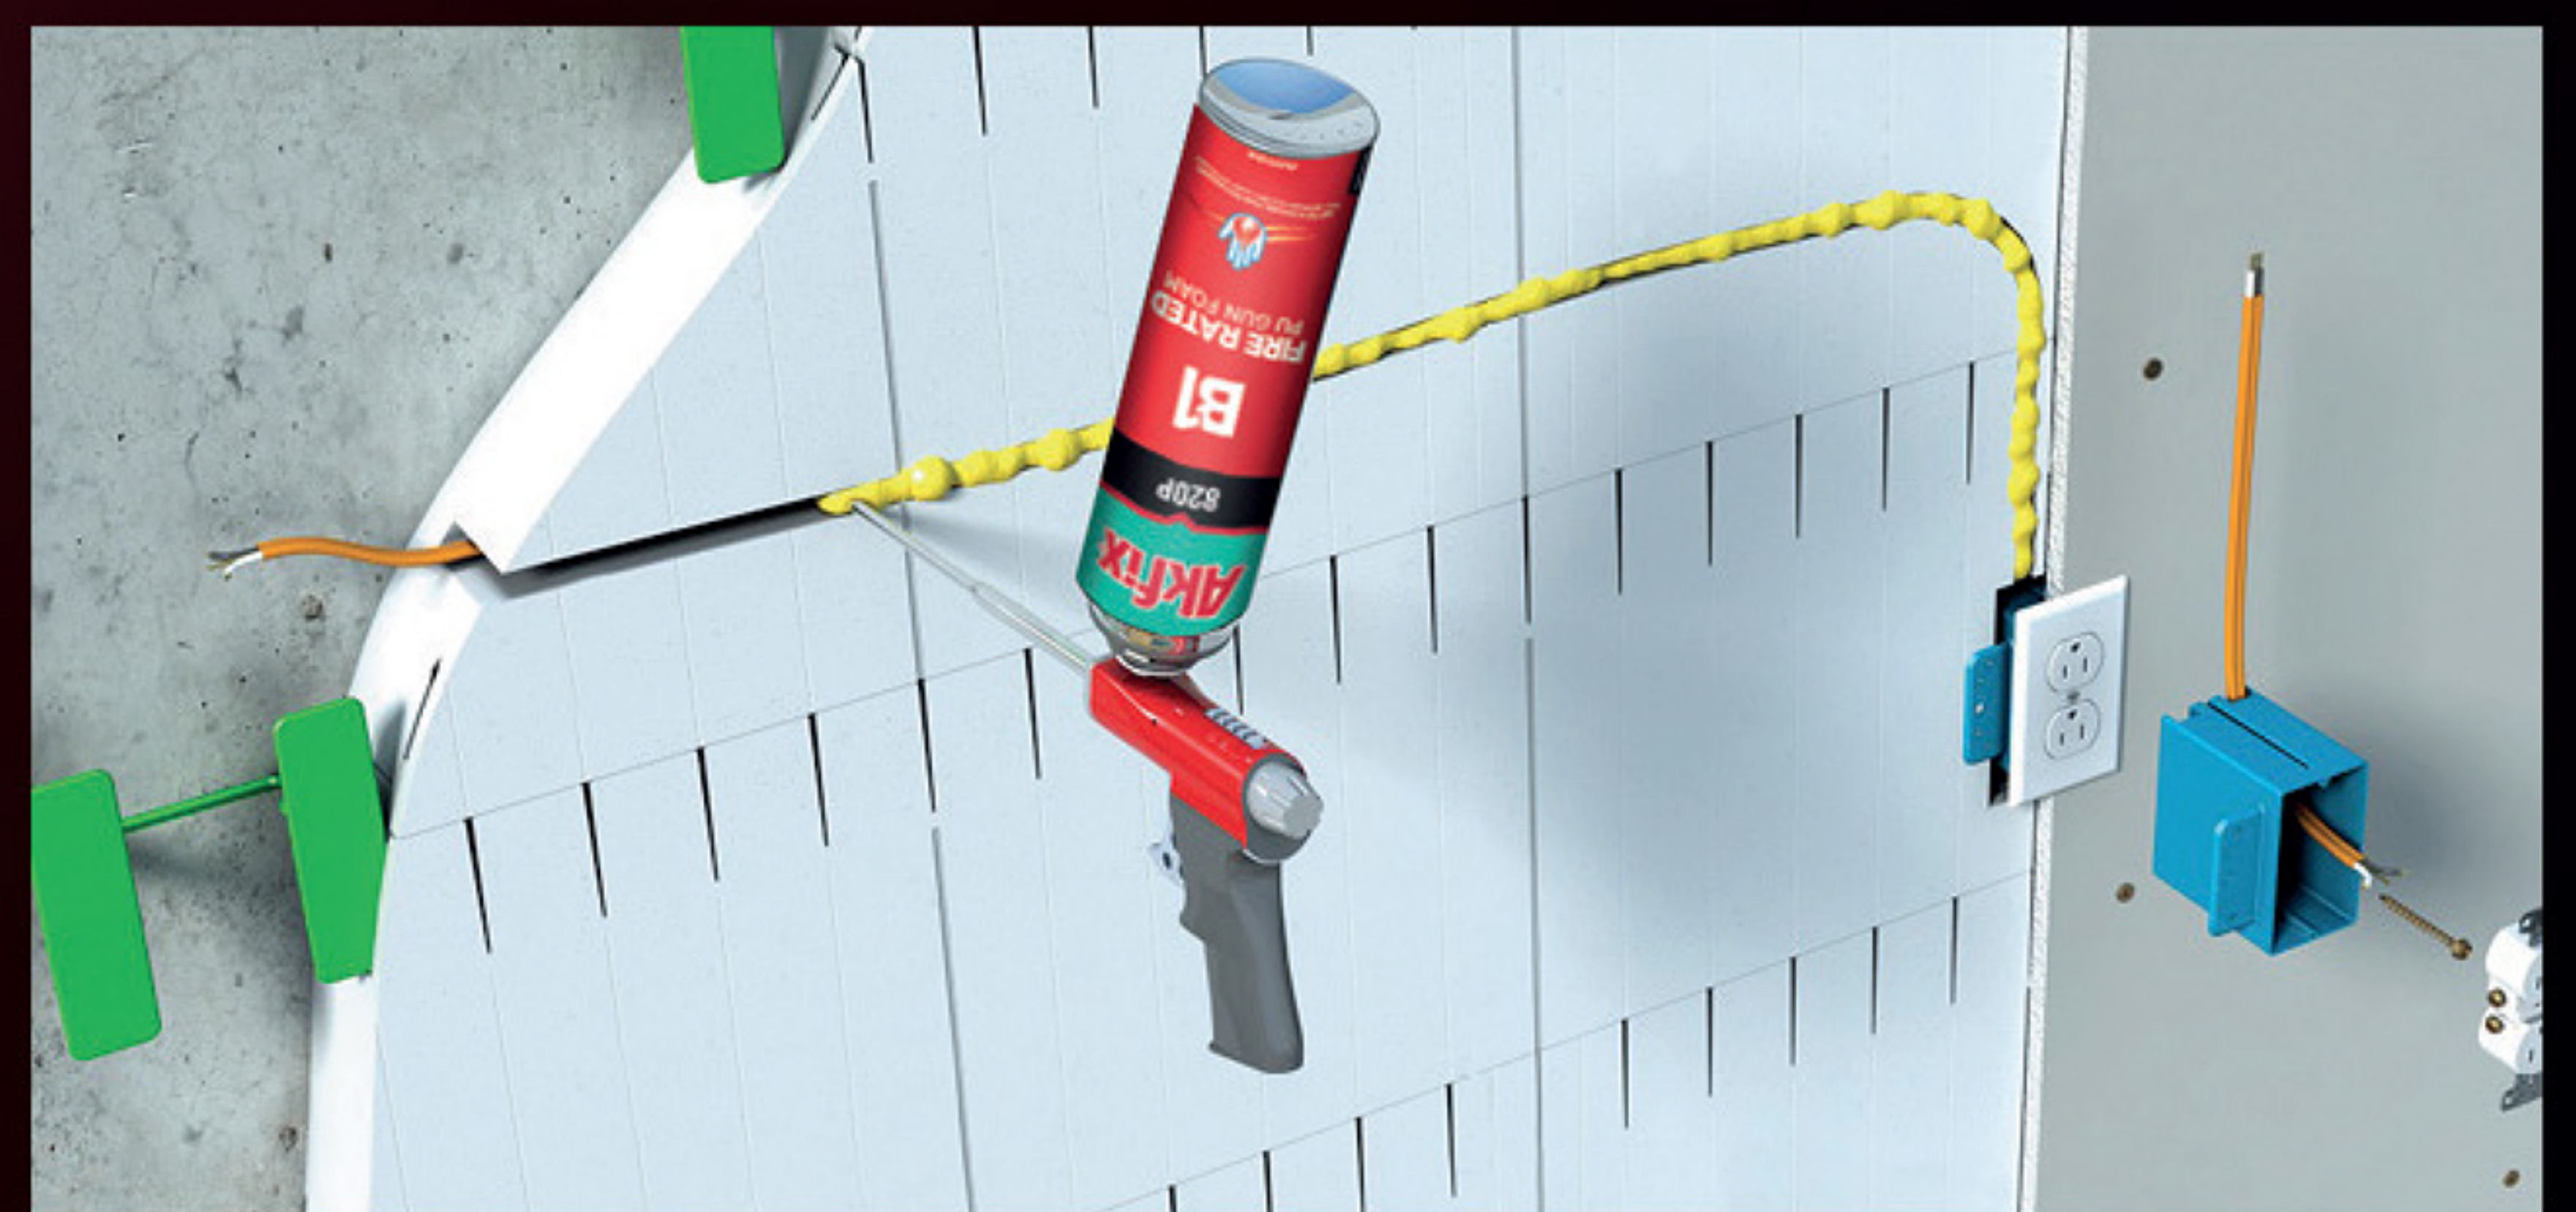

/Akfixsealants

www.Akfix.com

info@akfix.com